




BRILLANT 255

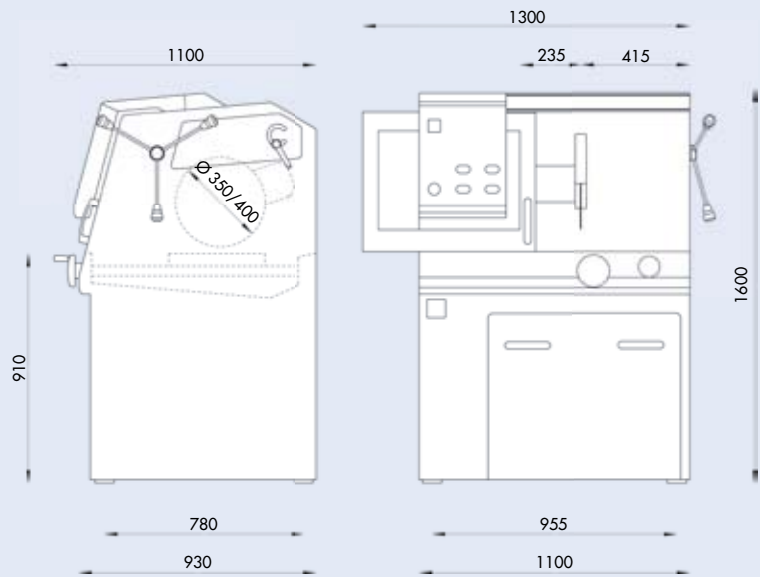

- » Manual horizontal movement with hand wheel
- » Precise manual vertical movement with lateral wheel (lockable)
- » Spacious cutting chamber with large table
- » Opening on left- and right-hand side for continuous long materials

- » Sliding door with door lock
- » Chamber illumination with LED, Easy-nut, arbour with protector
- » Solid aluminium design, powder coated

SPECIFICATIONS

Max. cutting capacity \varnothing 150 mm (depending on cut-off wheel)							
cut-off wheels	<table border="1"> <tr> <td>1</td> <td>\varnothing 350 mm</td> </tr> <tr> <td>2</td> <td>\varnothing 400 mm/16"</td> </tr> </table>	1	\varnothing 350 mm	2	\varnothing 400 mm/16"		
1	\varnothing 350 mm						
2	\varnothing 400 mm/16"						
Arbour size	\varnothing 32 mm (depending on cut-off wheel)						
Vertical movement	170 mm						
Horizontal movement	365 mm						
Table WxD	<table border="1"> <tr> <td>1</td> <td>550x375 mm (without z-axis)</td> </tr> <tr> <td>2</td> <td>420x375 mm (with z-axis)</td> </tr> <tr> <td>3</td> <td></td> </tr> </table>	1	550x375 mm (without z-axis)	2	420x375 mm (with z-axis)	3	
1	550x375 mm (without z-axis)						
2	420x375 mm (with z-axis)						
3							
T-slot	12 mm						
Motor	7,5 kW						
Power supply	Fixed speed 1950 rpm						
	<table border="1"> <tr> <td>1</td> <td>400 V/50 Hz (3 phases)</td> </tr> <tr> <td>2</td> <td>480 V/60 Hz (3 phases)</td> </tr> <tr> <td>3</td> <td>220 V/60 Hz (3 phases)</td> </tr> </table>	1	400 V/50 Hz (3 phases)	2	480 V/60 Hz (3 phases)	3	220 V/60 Hz (3 phases)
1	400 V/50 Hz (3 phases)						
2	480 V/60 Hz (3 phases)						
3	220 V/60 Hz (3 phases)						
Approx WxHxD	1100x1600x930 mm						
Weight	approx. 600 kg (depending on equipment)						

- | | |
|---|---------------------|
| 1 | |
| 2 | available equipment |
| 3 | |

